

CSR series

Current Sensing Resistors






- Power Rating 50W
- High Temperature : -55°C to +250°C
- Excellent Pulse Handling
- Resistance Range 0.01 to 0.07 Ohms
- Tolerances to $\pm 0.1\%$ ~ $\pm 1.0\%$
- Low TCR : $\pm 50\text{ppm/K}$ Standard
- Two Terminal Versions Available




■ SPECIFICATIONS

ITEM	SPECIFICATIONS
Operating Temp	-55 ~250°C
Resistance Range	0.0125Ω ~0.07Ω
Power	50W (W/O Heat Sink)
Temperature Coefficient	Max $\pm 30\text{ppm/}^\circ\text{C}$
Insulation Resistance	1MΩ minimum
Dielectric Withstanding Voltage	AC2500V for 1min, Max leakage current : 2mA
Operating Voltage	0.79V ~1.77V
Maximum Current	64A
Load Life	200,000 Cycles ($\pm 1\%$ +0.05Ω)
Mechanical Vibration	100G, 6ms Half Sine, 3Time /Axis, Total 6Axis $\pm 1\%$ 0.05Ω
Shot Time Overload	5 x for 5Sec $\pm 2\%$ + 0.05Ω

■ DIMENSIONS

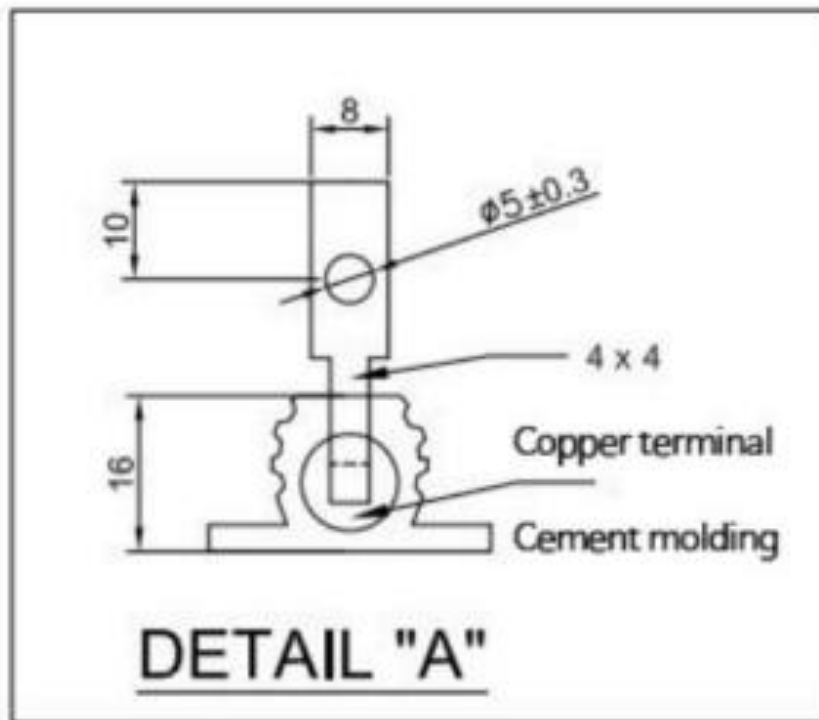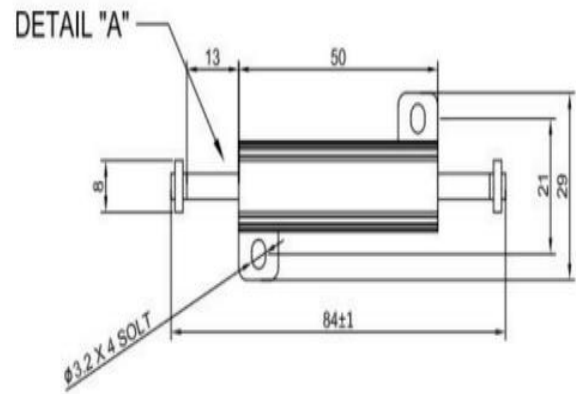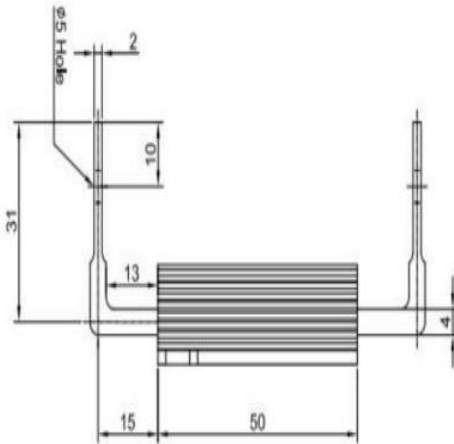

■ SURFACE TEMPERATURE INCREASE VERSUS POWER LOAD & RERATING CURVES

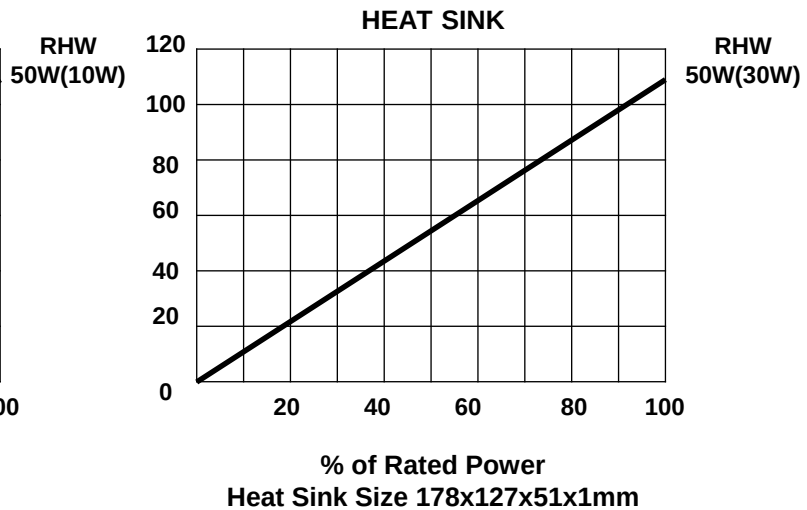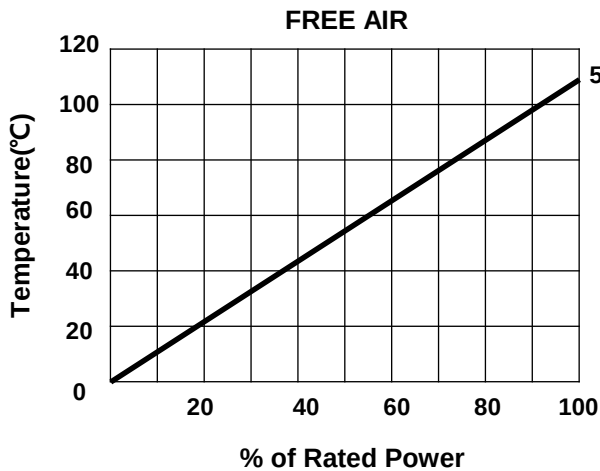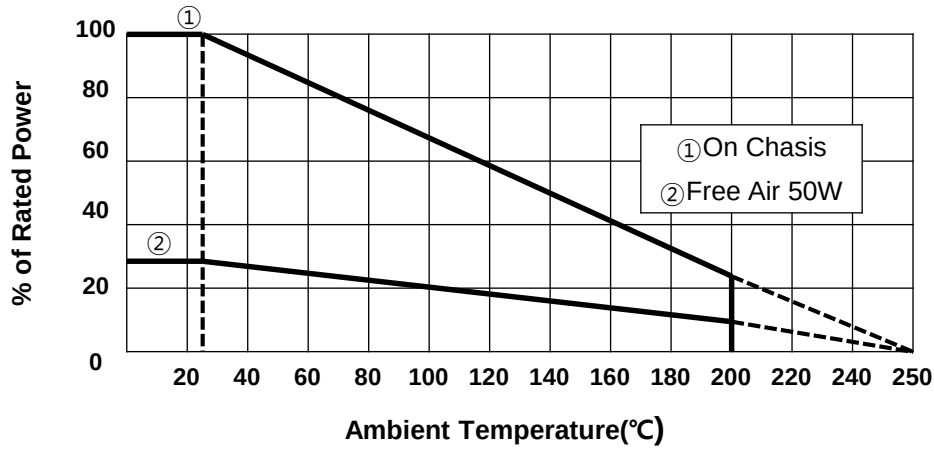

■ HOW TO ORDER

CSR	50W	0.0125Ω	±1%
TYPE	POWER RATING	RESISTANCE	TOLERANCE

www.resistors.co.kr

Tel +82-31-764-8216