

RQM series

Metal Clad Wire Wound Resistors for Automobile




**Automotive Grade
AEC-Q200**

- Power Rating from 40W to 70W
- Resistance Range of 10Ω to 250Ω
- Tolerances of 0.5% 1 %, 5%, or 10%
- Compact Design
- All Materials are Fire Resistant
- High Thermal Conductivity And Very Good Thermal Insulation


■ SPECIFICATIONS

ITEM	SPECIFICATION	
Temperature Range		- 55 ~ 150°C
Resistance Range		10Ω ~ 250Ω
Power Rating		40W (W/O Heat Sink) 70W (W/Heat Sink 300 x100 x3mm ³)
TCR		Max ± 260ppm/°C
Operating Voltage		≥1,000V
Insulation Resistance		1MΩ
Dielectric Strength		2,500VAC
Short Time Overload	±(2%+0.05Ω)	10 x for 5sec
Moisture Resistance	±(3%+0.05Ω)	40°C / RH95% 500 Hours, DC100V Case to Terminal
Mechanical Vibration	±(1%+0.05Ω)	100G ,6ms Half Sine, 3Time /Axis, Total 6Axis
Short Duration	±(2%+0.05Ω)	200ms.
Load Life	±(3%+0.05Ω)	200,000 cycles
Weight (g)		45±10


■ DIMENSIONS

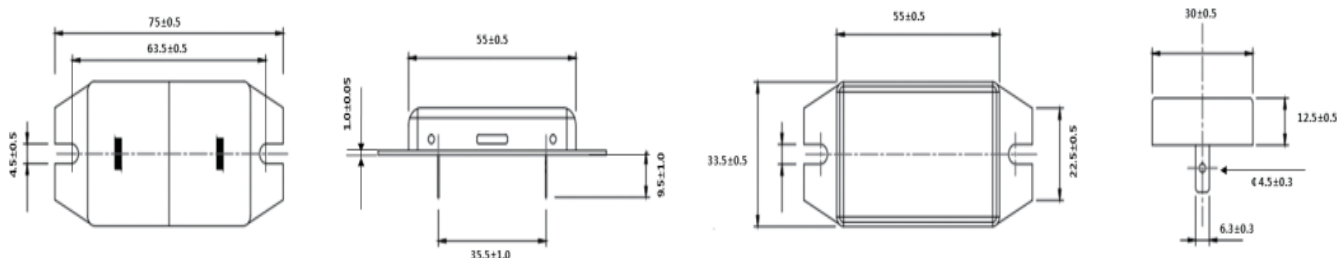


■ SURFACE TEMPERATURE INCREASE VERSUS POWER LOAD

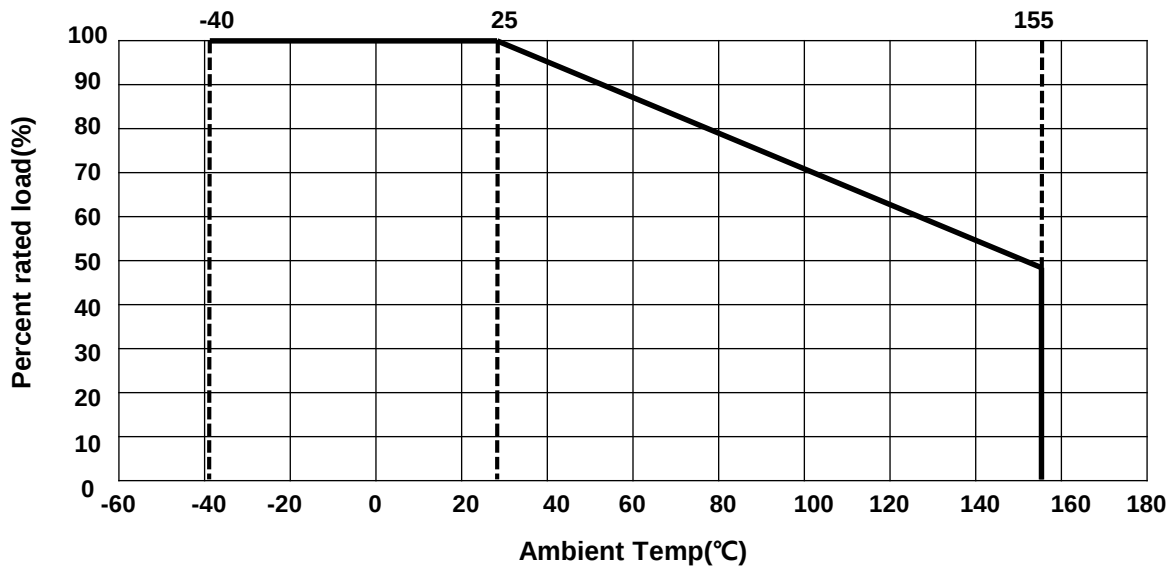

Free Air Surface Temperature Rise

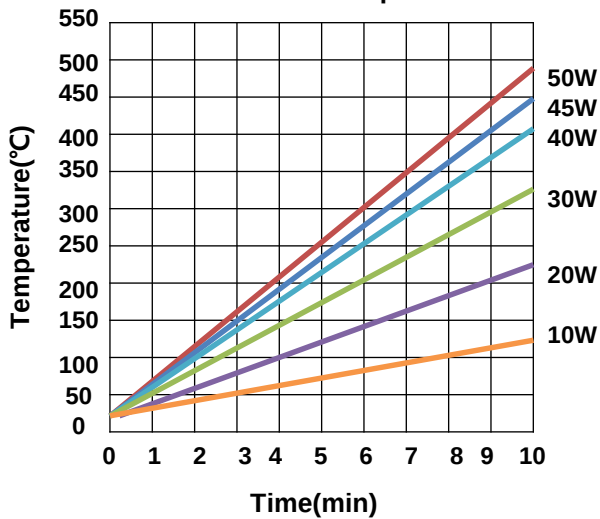

Surface Temperature Rise mounted to a 150x150x2mm heatsink

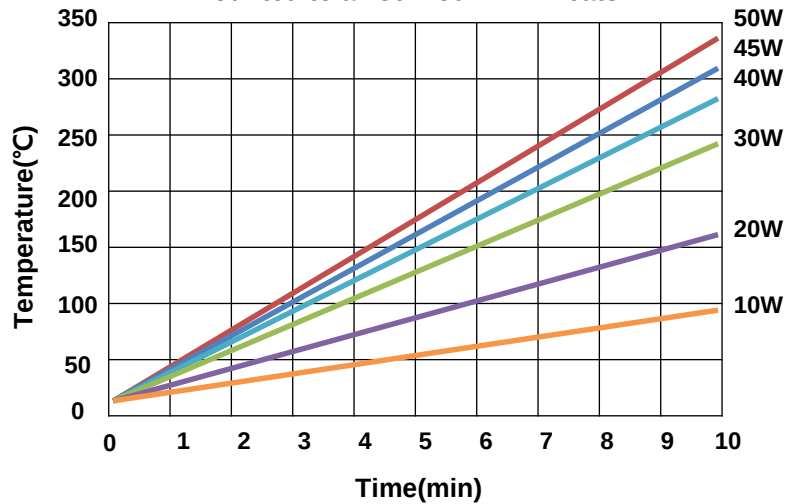

■ HOW TO ORDER

RQ	M	40W	30Ω	J
TYPE	STYLE	POWER RATING	NOMINAL RESISTANCE	RESISTANCE TOLERANCE

www.resistors.co.kr

Tel +82-31-764-8216